LED EMERGENCY LIGHT KIT

SAX01-54759

Product Features

- Intelligent automatic recharging function
- Automatic output current adjustment
- Constant current mode
- 3 hours emergency operation
- LED charge status display
- Deep discharge protection
- Test switch with self-test function
- Built-in compact design
- Suitable for LED luminaires with external driver

Technical Data

Technical Data	**EMLED3/60/3000**
Rated supply voltage	240V
Frequency	50/60Hz
Input current	40mA
Input power	4W
Power factor	0.5
Charge current	200mA
Recharge hours	20h
EM output current LED	400-40mA
EM output voltage LED	6-60V (2-20 LEDs)
EM output power LED	2.4W
Ambient temperature ta	-25...+50°C
Max. casing temperature tc	70°C
Battery type	Ni-Cd 3.6V 3Ah
Dimensions LxWxH	160x38x28mm
Fixing centre D	150mm

Important Notes

- Please ensure to disconnect with power supply when installing
- Please connect wires according to the wiring diagram shown below
- Please keep battery as far as possible from lamps/heat source when installing
- The LED charge indicator must be positoned where it can be seen without the need for the fitting to be removed from the ceiling or for tools to access it. This will in nearly every instance mean it must be mounted in the ceiling through its own hole.

Dimensions(mm)

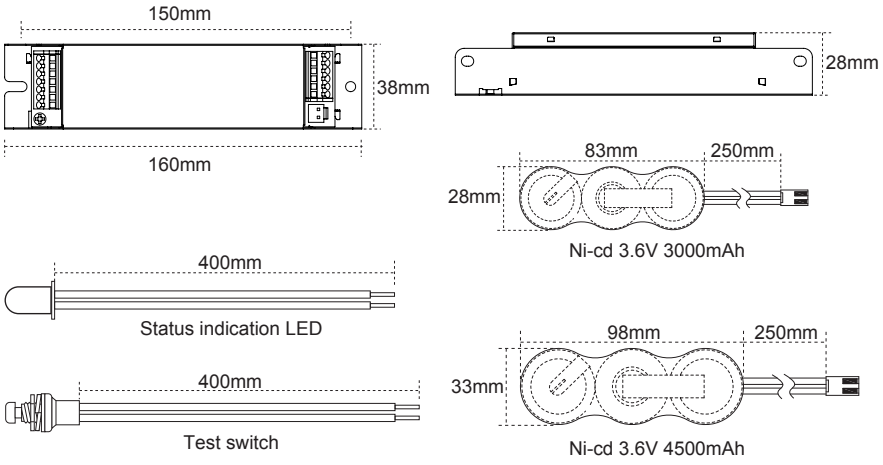

Wiring for LED Driver

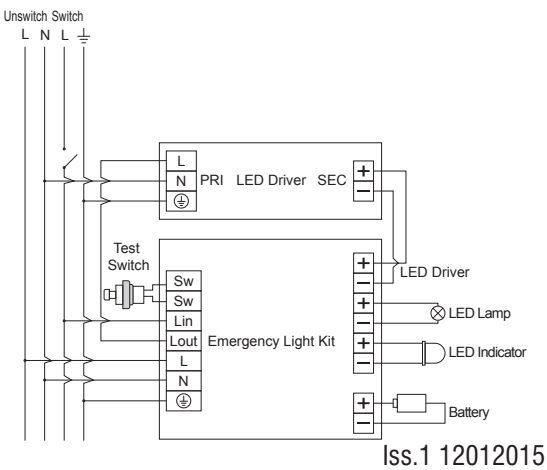

Iss.1 12012015